

DS-2CE16D1T-IT3 HD1080P EXIR Bullet Camera



Key Features

- 2 Megapixel high-performance CMOS
- Analog HD output, up to 1080P resolution
- True Day/Night, Smart IR
- EXIR technology, up to 40m IR distance
- IP66 weatherproof
- OSD menu
- Up the Coax(HIKVISION-C protocol)




Specifications

| Camera | |
|----------------------|---|
| Image Sensor | 2MP CMOS Image Sensor |
| Signal System | PAL/NTSC |
| Effective Pixels | 1930(H)*1088(V) |
| Min. illumination | 0.01 Lux @ (F1.2,AGC ON),0 Lux with IR |
| Shutter Time | 1/25(1/30)s to 1/50,000s |
| Lens | 3.6mm (6mm, 8mm, 12mm, 16mm optional) |
| | Angle of View: 91.3°(3.6mm), 59.9°(6mm), 41.5°(8mm), 26.6°(12mm), 20.6°(16mm) |
| Lens Mount | M12 |
| Day & Night | ICR |
| Angle Adjustment | Pan: 0 - 360°, Tilt: 0 - 180°, Rotation: 0 - 360° |
| Synchronization | Internal synchronization |
| Video Frame Rate | 1080p@25fps/1080p@30fps |
| HD Video Output | 1 Analog HD output |
| S/N Ratio | >62dB |
| Menu | |
| Camera ID | On/off (0-255) |
| AGC | Support |
| D/N Mode | Color/BW/Auto/EXT |
| White Balance | Auto/User/Push/8000K/6000K/4200K/3000K |
| Privacy Mask | On/Off, maximum 2 zones |
| Motion Detection | On/Off, maximum 4 zones |
| BLC | Support |
| Anti-flicker | On/Off |
| Language | English/Chinese |
| Functions | Digital noise reduction, Mirror |
| General | |
| Operating Conditions | -40 °C – 60 °C (-40 °F – 140 °F), Humidity 90% or less (non-condensing) |
| Power Supply | 12 VDC ± 15% |
| Power Consumption | Max. 4W |
| Protection Level | IP66 |
| IR Range | Up to 40m |
| Communication | Up the coax, Protocol: HIKVISION-C(TVI output) |
| Dimensions | 86.22×82.05×220.13mm(3.39"×3.23"×8.67") |
| Weight | 700 g |

Order Models

DS-2CE16D1T-IT3

Dimensions

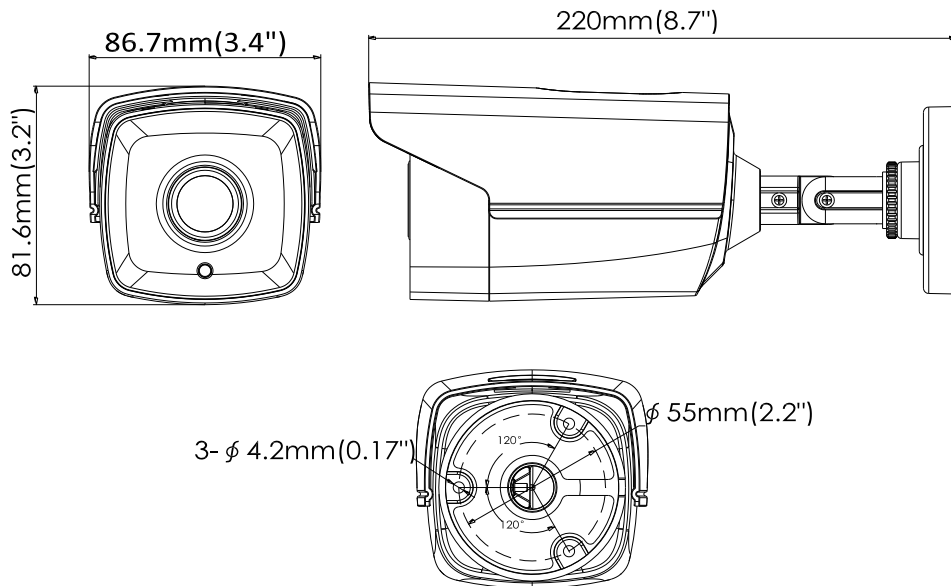

Accessories



DS-1280ZJ-XS
Junction box



DS-1H18
Video Balun



X41T
Camera Tester

Distributed by



Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
overseasbusiness@hikvision.com

Hikvision Poland
T +48-22-460-01-50
poland@hikvision.com

Hikvision USA
T +1-909-895-0400
sales.usa@hikvision.com

Hikvision India
T +91-22-28469900
sales@pramahikvision.com

Hikvision UK
T +44-1628-9021-4
support.uk@hikvision.com

Hikvision Europe
T +31-23-5542770
saleseuro@hikvision.com

Hikvision Italy
T +39-0438-6902
info.it@hikvision.com

Hikvision Singapore
T +65-6684-4718
sg@hikvision.com

Hikvision Middle East
T +971-4-8816086
salesme@hikvision.com

Hikvision France
T +33(0)1-85-330-444
info.fr@hikvision.com

Hikvision Oceania
T +61-2-8599-4233
salesau@hikvision.com

Hikvision Russia
T +7-495-669-67-99
saleru@hikvision.com

Hikvision Spain
T +34-91-737-16-55
info.es@hikvision.com

Hikvision Hong Kong
T +852-2151-1761